



# COOK CFS - Motorized Intake Damper


DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_

Motorized Intake Center Pivot Damper

CFS - Filtered Supply Units

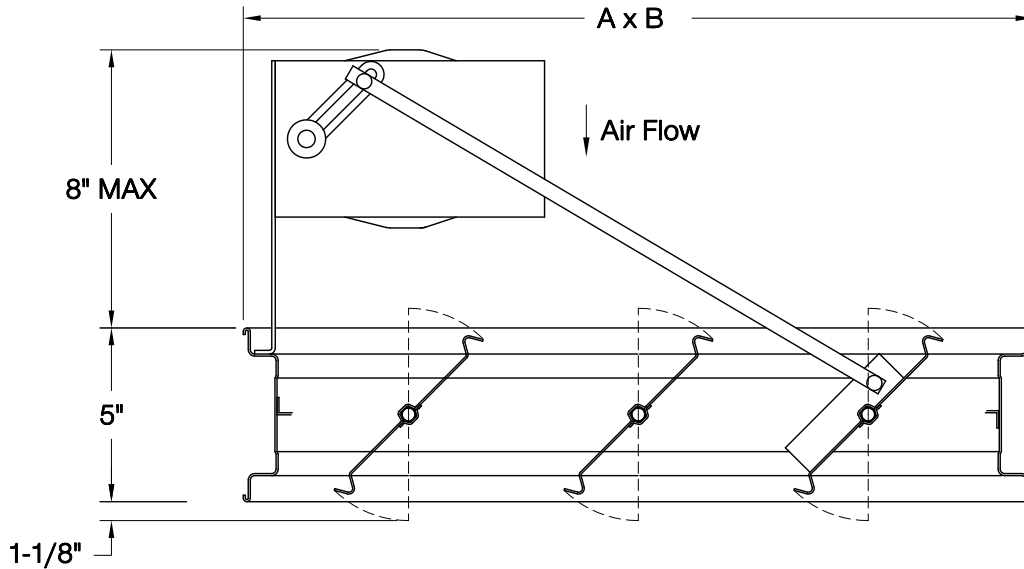

### STANDARD CONSTRUCTION FEATURES:

16 ga galvanized steel blades - 16 ga galvanized steel frame - 1/2" plated steel axle - synthetic bearings - Non-overloading motor.

### DIMENSION DATA

Qty	Mark	Unit Size	A	B	Ship Wt.
		120	17-11/16	12-1/8	15
		135	19-15/16	13-5/8	17
		150	22	15-1/4	20
		165	24	16-15/16	23
		180	26-1/16	18-1/2	26
		195	28-7/16	19-1/2	28
		210	30-3/8	21-5/8	30
		225	32-1/2	23-3/16	33
		245	35-1/16	25-1/2	36
		270	39-7/16	27-1/2	40
		300	43	31-3/16	43
		330	47-1/16	34-1/2	49
		365	52-3/16	38-11/16	53

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

### NOTES:

Motors are available in 115, 230, or 460 voltage.

CFS Motor operated intake damper is designed to be installed beneath the curb either in the duct work or optional damper tray.

Max operating temperature 130°F (50°C).