



MARK: _____
 PROJECT: _____
 DATE: _____

**Motorized Intake Center Pivot
 Backdraft Damper
 ETS, H-Series Units
 Supply Units**

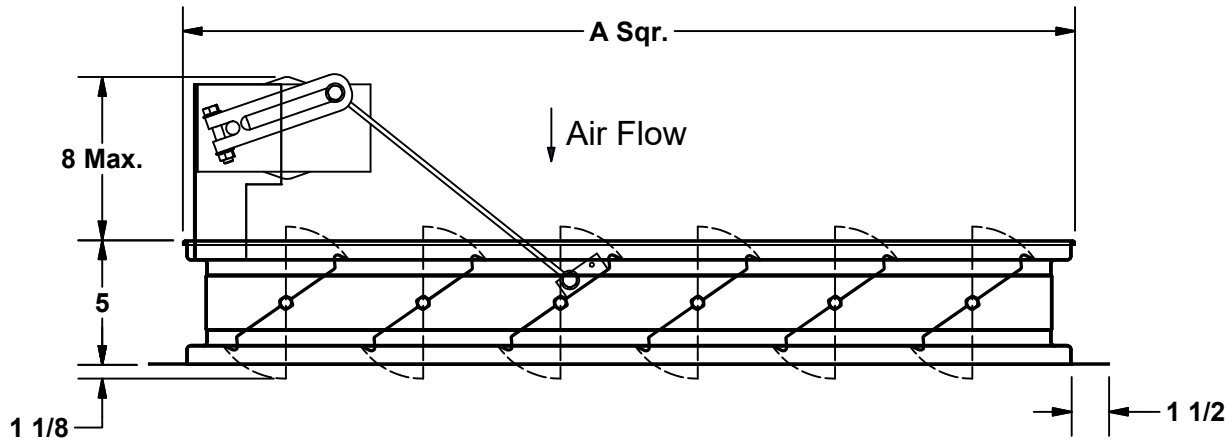

STANDARD CONSTRUCTION FEATURES:

16 GA galvanized steel blades - 16 GA galvanized steel frame - 1/2" plated steel axle - Synthetic bearings - Non-overloading motor.

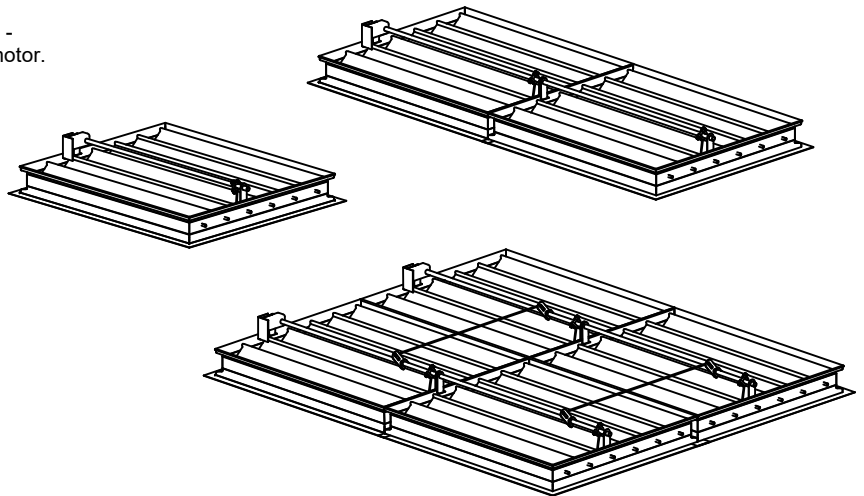

NOTES:

Motor packs are available in 24, 115, 230, or 460 voltage. A transformer will be supplied with power pack, unit size 36 and larger, to accommodate 230V and 460V installations. Motor operated intake damper requires 13-1/2" high roof curb. Max operating temperature 130°F (50°C).

DIMENSION DATA

Qty	Mark	ETS H-Series	Cat. No.	A Sqr.	Actuator Qty.	Unit Wt.
		20	BDMIC-26	22 3/4	1	25
		24	BDMIC-30	26 3/4	1	35
		30	BDMIC-36	32 3/4	1	52
		36	BDMIC-42	38 3/4	1	73
		42	BDMIC-48	44 3/4	1	97
		48	BDMIC-54	50 3/4	1	125
		54	BDMIC-60	56 3/4	1	157
		60	BDMIC-66	62 3/4	1	191
		72	BDMIC-78	74 3/4	3	272

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.