





COOK Fiberglass Control Damper

DATE: _____

PROJECT: _____

LOCATION: _____

Accessory Data Sheet
Motorized
Parallel Blade
Duct Mount
for FCP

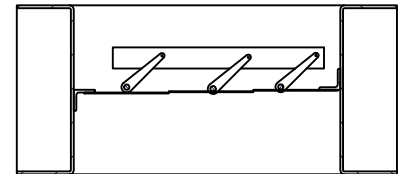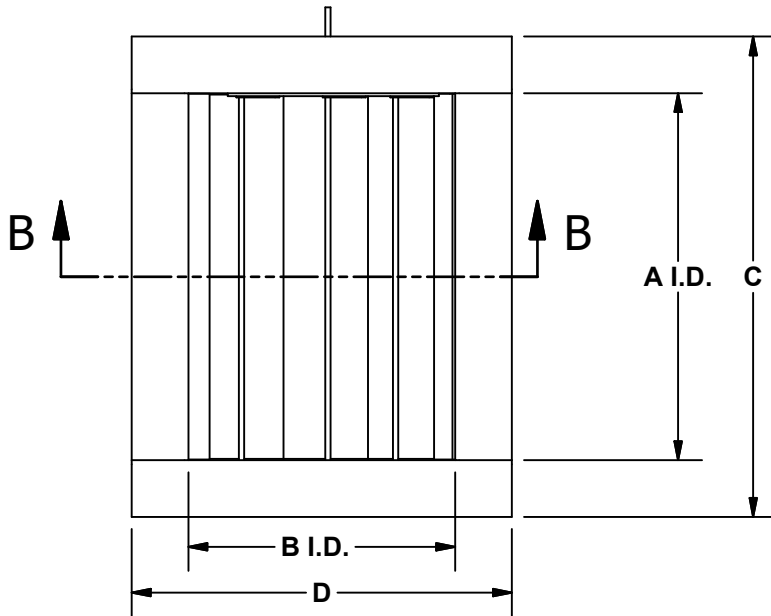

SECTION B-B

DIMENSION DATA

Size	PERCENTAGE	A	B	C	D
120	100	12 13/16	9 9/32	18 3/16	14 11/16
150	66	17 3/8	11 1/4	22 3/4	16 5/8
150	100	17 3/8	12 5/8	22 3/4	18
180	66	20	13	25 3/8	18 3/8
180	100	20	14 5/8	25 3/8	20
210	66	25 1/8	16	30 1/2	21 3/8
210	100	25 1/8	18 1/8	30 1/2	23 1/2
245	66	26 3/8	17	31 3/4	22 3/8
245	100	26 3/8	19 1/4	31 3/4	24 5/8
270	66	30 7/8	19 7/8	36 1/4	25 1/4
270	100	30 7/8	22 3/8	36 1/4	27 3/4
300	66	32 5/8	21 1/8	38	26 1/2
300	100	32 5/8	24 1/8	38	29 1/2
330	66	35 5/8	23 1/8	41	28 1/2
330	100	35 5/8	26 1/8	41	31 1/2
365	66	38 7/8	25 1/2	44 1/4	30 7/8
365	100	38 7/8	29 1/8	44 1/4	34 1/2

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.

Standard Construction Features:

All parts are fiberglass and Isophthalic polyester resin - Joints are bonded with an industrial grade epoxy adhesive, having similar corrosion resistant properties as a polyester resin - Resin has a Class I flame spread rate of 25 or less -Surfaces are protected to be ultra-violet resistant.

Note: For duct mount only. Will not fit in roof curb damper tray.