



COOK

AVAD

DATE: _____

PROJECT: _____

LOCATION: _____



Adjustable Pitch Vane Axial Horizontal Floor Mount Direct Drive Arrangement 4

DIMENSION DATA

Size	A	B	C	D	E	F	G	H	J	K	L	M	N
35	35-1/2	39-7/8	38	3/16	30	9/16	12	5/8	26-3/4	1-5/8	23	41	12
39	39-3/8	43-3/4	41-7/8	1/4	30	9/16	12	5/8	26-1/2	1-3/4	26	45	13-3/8
44	44-1/8	49-5/8	47-3/8	1/4	34	9/16	12	5/8	30-1/2	1-3/4	28-1/2	51	15-3/8
49	49-1/4	54-3/4	52-1/2	1/4	34	9/16	12	5/8	30-1/2	1-3/4	31-1/2	56	17
57	57-1/8	62-5/8	60-3/8	1/4	42	9/16	12	5/8	38-1/2	1-3/4	36-1/2	64	21
63	63	68-1/2	66-1/4	1/4	42	11/16	16	3/4	38-1/2	1-3/4	40	70	21-5/8
71	70-7/8	77-5/8	75	3/8	54	11/16	16	3/4	49-1/2	2-1/4	44	78-1/2	24-3/8
79	78-3/4	85-1/2	82-7/8	3/8	54	11/16	16	3/4	49-1/2	2-1/4	47-1/2	87	27-3/8

Size	TEFC Max Frame Size	Ship Wt. less Mtr.
35	256TC	515
39	256TC	753
44	286TC	944
49	286TC	1349
57	405TC	1771
63	405TC	2048
71	449TC	3490
79	449TC	3894

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.


STANDARD CONSTRUCTION FEATURES:

All aluminum adjustable pitch prop –
Minimum 7 ga. Lorenized steel housing
with integral straightening vanes –
Extended lube lines – 'C' face motor
mount – Rotatable bolted mounting feet.

ACCESSORIES

1. INLET/OUTLET GUARD
2. INLET/OUTLET COMPANION FLANGE
3. VIBRATION ISOLATORS
4. INLET BELL
5. INLET/OUTLET CONE
6. ACCESS DOOR
7. SOUND MUFFLER

NOTE: Feet can be rotated for ceiling suspension.

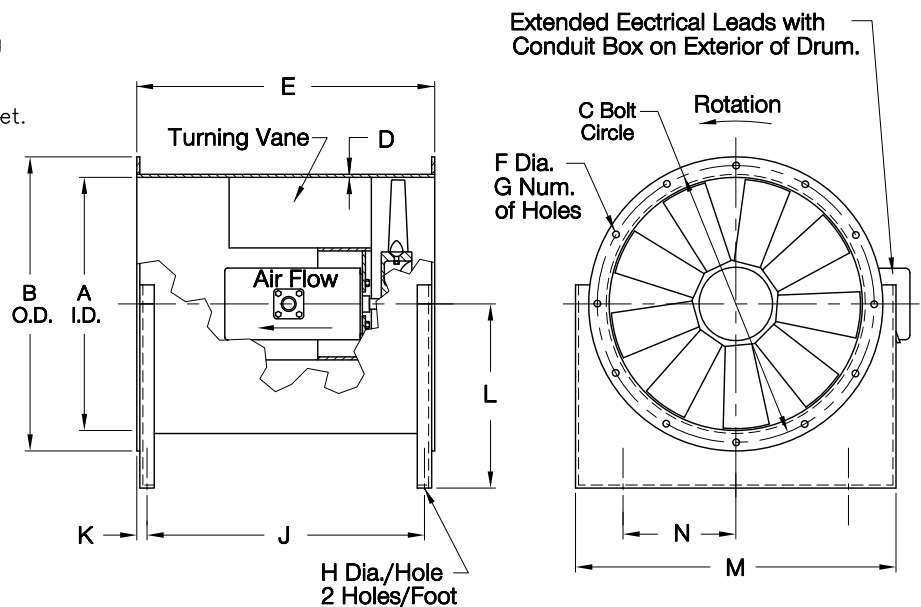

VA110R02