



COOK

QMXLE/QMXHPLE

MARK: _____

PROJECT: _____

DATE: _____



**Laboratory Exhaust
Mixed-Flow Inline
Belt Drive
with 1x3 Mixing Box
Parallel Bypass**

DIMENSION DATA

Size	A	B	C	D	E	F	G Height	H	J Width	K	L	M	Unit Weight	
													STD	HP
90	120	28	27 3/16	21 3/8	36 11/16	38	10 9/16	8	19 3/4	99 1/2	100	36 1/2	2293	2308
120	120	28	27 3/16	25 5/8	40 7/16	39	12 13/16	8	19 3/4	99 1/2	100	36 1/2	2571	2576
135	120	28	27 1/8	27 3/4	41 5/8	40	14 13/16	8	18 9/16	99 1/2	100	36 9/16	3232	3237
150	120	30	29 1/8	29 9/16	44 1/8	43	16 9/16	8	20 9/16	105 1/2	106	38 9/16	3407	3413
165	120	32	31 1/8	31 11/16	45 1/2	46	18 5/16	8	22 9/16	111 1/2	112	40 9/16	3812	3849
180	120	34	33 1/8	34 1/16	48	48	19 1/16	8	24 9/16	133 1/2	134	50 9/16	4441	4472
202	125 13/16	38	36 15/16	37 15/16	51 7/8	54	22 9/16	8	28 9/16	141 1/4	142	52 9/16	5256	5294
225	134 3/4	42	40 15/16	41 1/8	58	59	22 9/16	9	30 9/16	143 1/4	144	51 9/16	5940	6032
245	146 1/16	44	42 15/16	43 7/16	60 5/8	62	24 13/16	9	32 9/16	171 5/16	172	64 9/16	6867	6932
270	155 5/16	48	46 15/16	47	64 5/8	67	26 9/16	9	36 9/16	175 5/16	176	64 9/16	7700	7748
300	171 1/16	52	50 15/16	51 3/16	69 7/16	72	29 13/16	9	40 9/16	211 5/16	212	80 9/16	9327	9388
330	185 3/4	56	54 13/16	55 15/16	75 15/16	78	33	9	44 1/2	215 5/16	216	80 9/16	10025	10103
365	203 3/16	62	60 3/4	61 15/16	81 5/8	86	35	11	46 3/8	255 1/4	257	97 3/4	13534	13703
402	222	67	65 5/8	67 1/8	89 5/16	94	41 1/4	11	50 5/16	260 3/8	262	97 3/4	16068	16241
445	248 1/8	74	72 5/8	73 1/4	96 1/8	106	47	13	53 5/16	267 3/8	269	97 3/4	18864	19012
490	271	80	78 1/2	79 9/16	104 1/16	117	57 1/4	13	59 1/8	303 1/2	305	112 7/8	30123	30347

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.
 * RECOMMENDED CURB OUTSIDE SQUARE DIMENSION.
 ** MIXING BOX INSIDE SQUARE DIMENSION.
 *** DIMENSION IS FROM THE BOTTOM OF THE CURB CAP TO THE TOP OF THE CURB. SIZE 490 DIMENSION IS 4".


STANDARD CONSTRUCTION FEATURES:

High efficiency, non-overloading mixed-flow welded wheel - Minimum 14 gauge steel welded housing - Welded aerodynamic straightening vanes - Hinged discharge damper - Phenolic epoxy powder with UV protection (Light Gray) - L10/40k Concentric locking regreasable bearings - Bolted access door - Lifting lugs - Fan drain - Weather cover - Reinforced curb cap - Stainless Steel shaft - Stainless Steel hardware - Stainless Steel extended lube lines - NEMA 3R disconnect mounted and pre-wired - 1.5 Service factor drives - Designed to withstand 125 mph wind****

BYPASS PLENUM: Single wall welded steel construction with inner angle frame - Bottom inlet location - Phenolic epoxy powder with UV protection (Light Gray) - Plenum drain - Bolted access door - Painted aluminum bypass damper with manual hand quadrant - Painted aluminum isolation damper with 2 position actuator - Weather hood - Stainless steel birdscreen - Stainless Steel hardware - Designed to withstand 125 mph****

OPTIONAL FEATURES SHOWN:

Heavy Duty Lab Exhaust Curb
 Side Intake Opening
 Damper Actuator
 Isolation Damper

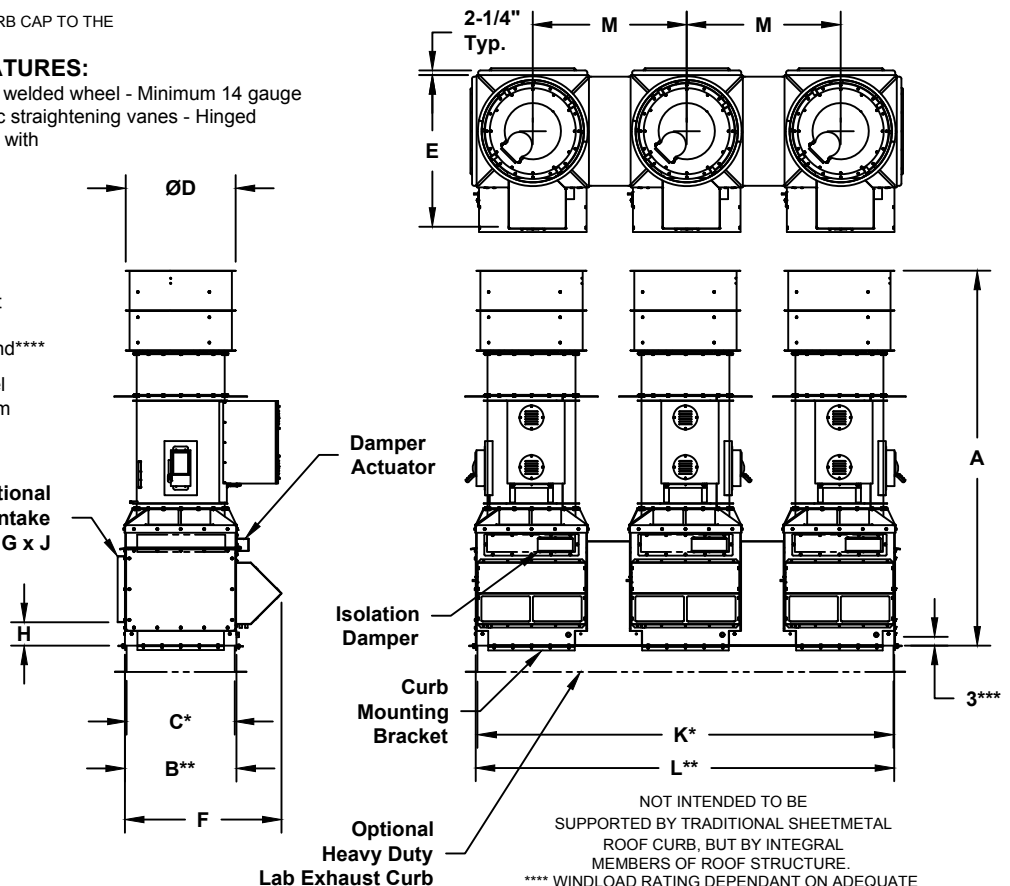

NOT INTENDED TO BE SUPPORTED BY TRADITIONAL SHEETMETAL ROOF CURB, BUT BY INTEGRAL MEMBERS OF ROOF STRUCTURE.
 **** WINDLOAD RATING DEPENDANT ON ADEQUATE ATTACHMENT TO ROOF STRUCTURE.