



MARK: _____
 PROJECT: _____
 DATE: _____

Accessory Data Sheet
CPSLE-S, CPSALE-S, CPSFE & CPSAFE
 Upblast
 Class I & II

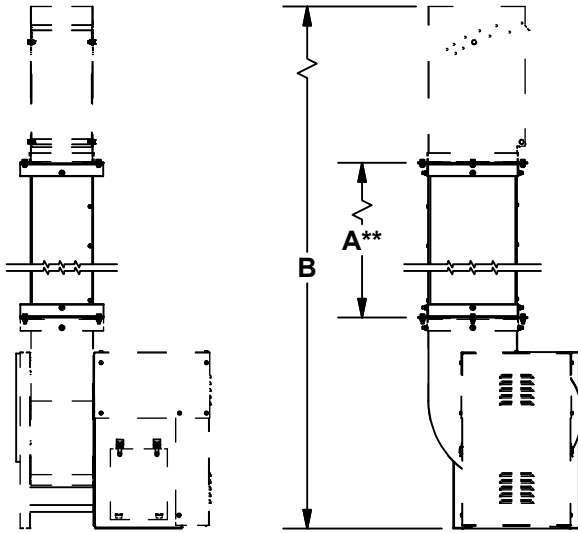

CPSLE-S & CPSALE-S

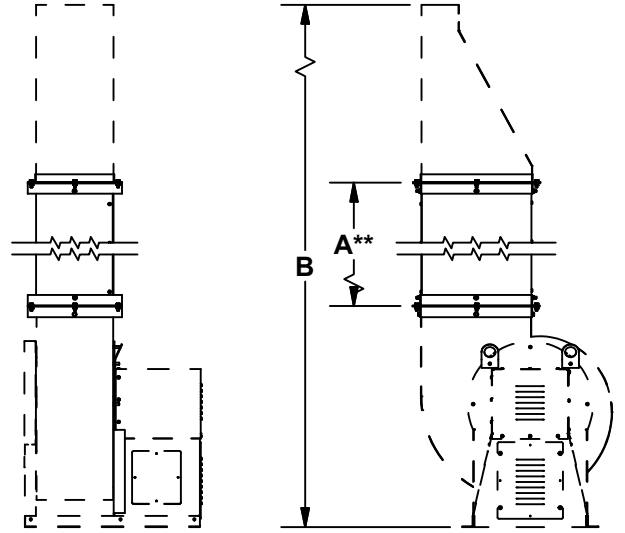

CPSFE & CPSAFE

Standard Construction Features:

- Corrosion resistant aluminum construction.
- Designed to withstand 125 mph wind without the need for guy wires*.

Notes:

- *Wind Rating Dependant on Adequate Mounting Structure.
- **This section may consists of more than one stack section for shipping.
- Clockwise Rotation Shown.

DIMENSION DATA

Size	A CL-I	A CL-II	B	UNIT WT. CL I	UNIT WT. CL II
100	70 1/4	n/a	120	48	n/a
120	65 3/8	61 3/8	120	55	53
135	62	57 15/16	120	58	43
150	57 15/16	55	120	48	47
165	53 5/8	50 1/16	120	50	48
180	48 3/8	46 7/16	120	51	49
195	44 5/16	43 3/4	120	52	51
210	37 15/16	37 15/16	120	51	51
225	33	33	120	49	49
245	27 7/16	27 7/16	120	52	52
270	19 3/8	19 3/8	120	49	49
300	9 1/4	9 1/4	120	43	43

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.