


MARK: _____
 PROJECT: _____
 DATE: _____

**Fiberglass Upblast Centrifugal
 Exhaust Ventilator
 Roof Mounted/Belt Drive**

STANDARD CONSTRUCTION FEATURES:

Solid corrosion resistant molded vinyl ester resin fiberglass wheel - The housing and other standard components are of corrosion resistant fiberglass from polyester resin with a Class I flame spread rate of 25 or less - One piece curb cap for sealed corners - Neoprene shaft seal - Permanently lubricated ball bearing motors - Oil and heat resistant, static conducting belts - Heavy-duty, deep row radial ball or double row spherical roller type self aligning and shielded in cast iron housing bearings - Suitable for airstream temperatures up to 200°F - Adjustable pitch drives through 5 hp motor - Corrosion resistant fasteners outside airstream - Stainless steel fasteners inside airstream - UV (Ultraviolet) inhibitor - All fans factory adjusted to specified fan RPM - Transit tested packaging - Standard motors ship factory installed.

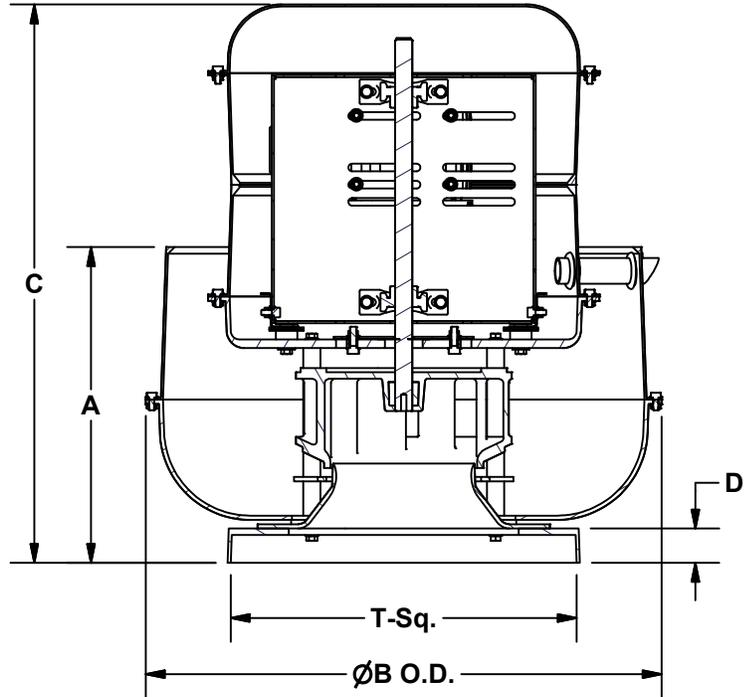

DIMENSION DATA

Size	A	B	C	D	T Sq.	Roof Opening Sq.*	Ship Wt.
120	18 3/8	30	32 1/2	2	20	15 1/2	102
150	21 1/4	34 7/8	32 7/8	2	24	19 1/2	146
180	25 5/16	39 3/8	42 5/16	3	30	25 1/2	194
245	31 1/2	50 1/8	46 15/16	3	30	25 1/2	295
300	34 3/4	54 7/8	57	3	36	31 1/2	448
365	38 3/8	65 1/4	61 7/16	3	42	37 1/2	616
402	41 5/8	65 1/4	64 13/16	3	48	43 1/2	717

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.
 *ROOF OPENING SIZE FOR CURBS SUPPLIED BY COOK ONLY.

ACCESSORIES

1. DISCONNECT SWITCH (Shipped loose)
2. FIBERGLASS GRAVITY BACKDRAFT DAMPER
3. RCF FIBERGLASS CURB
4. RCG GALVANIZED CURB
5. RCA ALUMINUM CURB
6. STAINLESS STEEL BIRDSCREEN

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES							
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE								

MOTOR TYPE: ODP (OPEN DRIP-PROOF); 2 SP (2 SPEED);
 X-PRF (EXPLOSION PROOF); TEFC (TOTALLY ENCLOSED FAN COOLED);