

# QMX

## The Industry Standard in Mixed Flow Fans

The most efficient, and most adaptable mixed flow fan


QMX offers three construction levels and three wheel types in six combinations

- Performance range extended to 15" w.g.!
- Available in 18 sizes from 90 - 600
- Allows more refined selections



## Performance Range of QMX Wheels:

Offering performance ranging up to 179,000 CFM in a compact and efficient design, the QMX is a great choice for supply, exhaust, or return fan applications

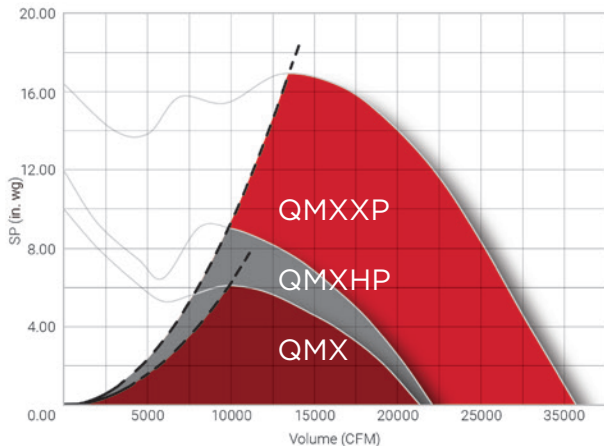

### QMXXP

- Optimized for static pressures of 8" to 15" w.g.
- Airflow up to 179,000 CFM



### QMXHP

- Optimized for static pressures of 4" to 8" w.g.
- Airflow up to 118,000 CFM



### QMX

- Optimized for static pressures of 0.5" to 4" w.g.
- Airflow up to 124,000 CFM

**Available Configurations:**

	QMX & QMXHP		QMXXP	
CONSTRUCTION	Level 1	Level 2	Level 2	Level 3
PRESSURE RANGE	Up to 4"	Up to 8"	Up to 8"	Up to 15"
AVAILABLE ARRANGEMENTS	9	3, 4, 9	9	9
AVAILABLE SIZES	165-600	90-600	150-600	150-600



Arrangement 3



Arrangement 4  
Dual Door



Arrangement 4



Arrangement 4  
Bifurcated



Arrangement 9  
Horizontal Mount



Supply / Exhaust



Upblast



Vertical Indoor