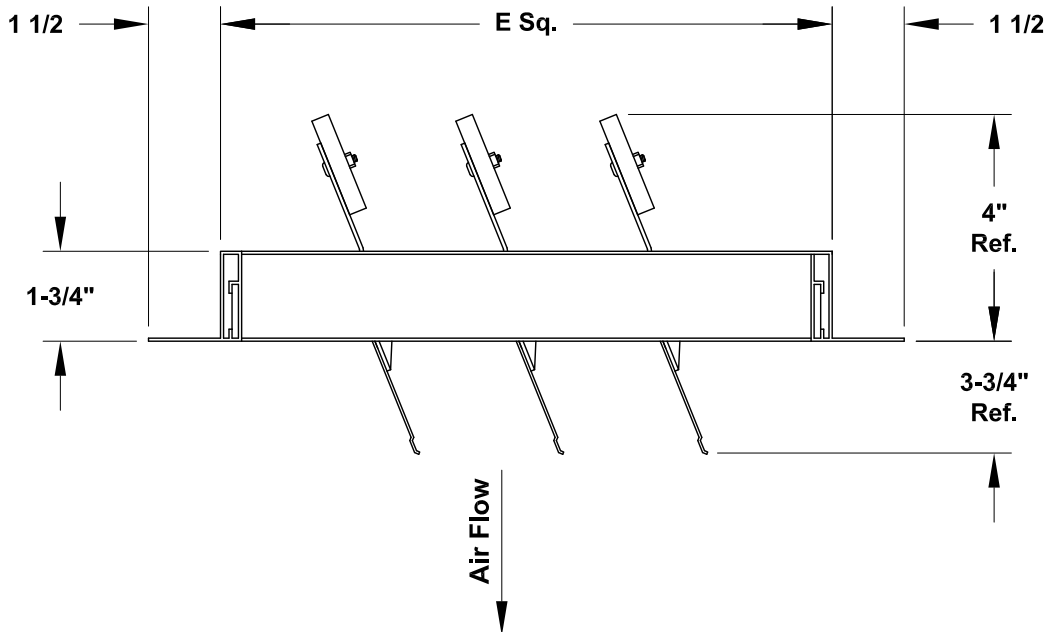


MARK: _____

PROJECT: _____

DATE: _____

Intake Backdraft Damper
Counterbalanced
ETS, H-Series
Supply Units


STANDARD CONSTRUCTION FEATURES:

Blades are roll formed 3003H14 aluminum - Blades have vinyl edge gasket - Damper frame is extruded 6063 T6 aluminum - Extruded aluminum blade link bar connects each blade for uniform blade positioning - Blades pivot on full width extruded aluminum blade hanger for added strength.

DIMENSION DATA

Qty	Mark	ETS H-Series	Cat. No.	E Sq.	Panel Qty.	Unit Wt.
		20	BDIC-26	22-3/4	1	22
		24	BDIC-30	26-3/4	1	24
		30	BDIC-36	32-3/4	1	32
		36	BDIC-42	38-3/4	1	49
		42	BDIC-48	44-3/4	1	58
		48	BDIC-54	50-3/4	2	70
		54	BDIC-60	56-3/4	2	79
		60	BDIC-66	62-3/4	2	88
		72	BDIC-78	74-3/4	2	124

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

NOTES:

Max operating temperature 200°F (95°C).

THE MODEL BDIC DAMPERS ARE DESIGNED TO REDUCE BACK DRAFTS; PREVENT ENTRY OF SOME FOREIGN MATERIAL AND PESTS, SUCH AS BIRDS; AND LIMIT THE AMOUNT OF RAIN THAT ENTERS THE BUILDING. THESE SHUTTERS ARE INTENDED TO BE WEATHER-RESISTANT, BUT ARE NOT WEATHER-PROOF FOR EXTREME CONDITIONS.