



# COOK Fiberglass Control Damper

DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_



## Accessory Data Sheet

Motorized

Opposed Blade

Duct Mount

FCP

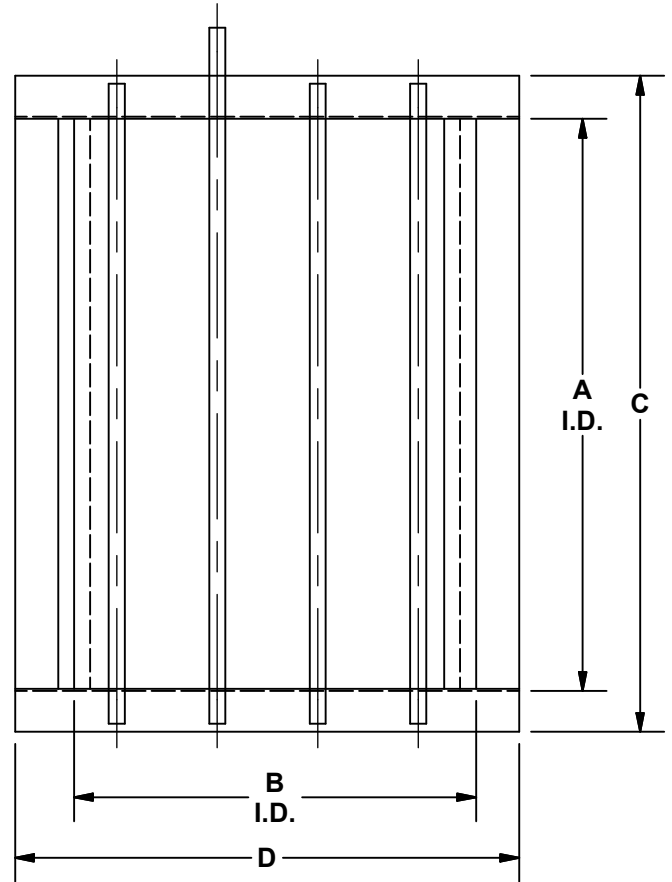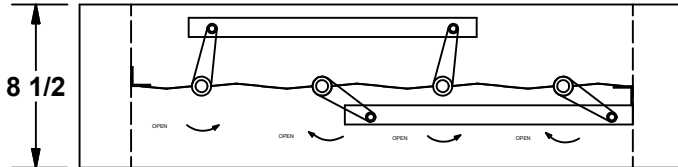

### DIMENSION DATA

Size	PERCENT	A	B	C	D
120	100%	12 13/16	9 5/16	18 1/4	14 11/16
120	66%	12 13/16	8 5/8	18 1/4	14
150	100%	17 3/8	12 5/8	22 3/4	18
150	66%	17 3/8	11 1/4	22 3/4	16 5/8
180	100%	20	14 5/8	25 3/8	20
180	66%	20	13	25 3/8	18 3/8
225	100%	25 1/8	18 1/8	30 1/2	23 1/2
225	66%	25 1/8	16	30 1/2	21 3/8
245	100%	26 3/8	19 1/4	31 3/4	24 5/8
245	66%	26 3/8	17	31 3/4	22 3/8
270	100%	30 7/8	22 3/8	36 1/4	27 3/4
270	66%	30 7/8	19 7/8	36 1/4	25 1/4
300	100%	32 5/8	24 1/8	38	29 1/2
300	66%	32 5/8	21 1/8	38	26 1/2
330	100%	35 5/8	26 1/8	41	31 1/2
330	66%	35 5/8	23 1/8	41	28 1/2
365	100%	38 7/8	29 1/8	44 1/4	34 1/2
365	66%	38 7/8	25 1/2	44 1/4	30 7/8
402	100%	45 1/8	32 1/8	50 1/2	37 1/2
402	66%	45 1/8	28 1/2	50 1/2	33 7/8

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.

### Standard Construction Features:

All parts are fiberglass and Isophthalic polyester resin - Joints are bonded with an industrial grade epoxy adhesive, having similar corrosion resistant properties as a polyester resin - Resin has a Class I flame spread rate of 25 or less - Surfaces are protected to be ultra-violet resistant.

**Note:** For duct mount only. Will not fit in roof curb damper tray.