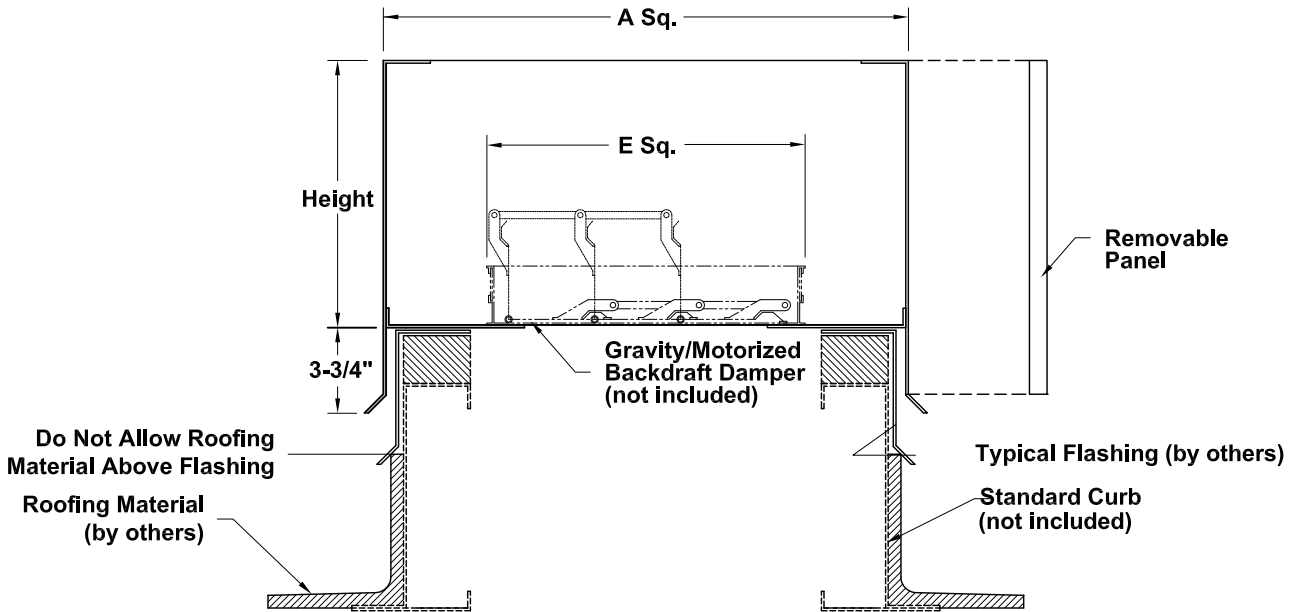


DATE: _____

Extended Base

PROJECT: _____


LOCATION: _____


STANDARD CONSTRUCTION FEATURES:

 18 gauge galvanized steel construction.
 One removable side panel.

OPTIONS:

 .063" aluminum construction.
 4" high construction with no damper shelf and no damper access.
 8" high construction.
 12" high construction (minimum required if motorized damper).

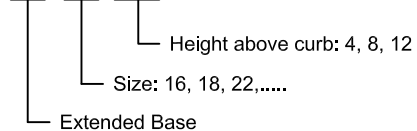CATALOG NUMBER DEFINITION:
XB - 16 - 12H

DIMENSION DATA

Qty	Mark	Centrifugal Units	PR/TR Propeller Units	Cat. No.	A Sq.	Item Wt.						Gravity/Motorized Backdraft Damper	
						Aluminum			Steel			Cat. No.	E Sq.
						4"	8"	12"	4"	8"	12"		
		60,70,80,90,100	8	XB-16	17	9	10	12	19	23	27	BD/BDM-12	11-3/4
		120,135	12	XB-18	19	10	12	14	21	25	30	BD/BDM-14	13-3/4
		150,165	-	XB-22	23	11	14	16	25	30	36	BD/BDM-18	17-3/4
		-	16	XB-26	27	13	16	19	29	35	42	BD/BDM-22	21-3/4
		180,195,210,225,245	-	XB-28	29	14	17	20	31	38	44	BD/BDM-24	23-3/4
		-	20	XB-30	31	15	18	22	33	40	47	BD/BDM-26	25-3/4
		270,300	24	XB-34	35	17	21	24	37	45	53	BD/BDM-30	29-3/4
		330,365	30	XB-40	41	20	24	28	43	53	62	BD/BDM-36	35-3/4
		402	36	XB-46	47	23	27	32	50	60	71	BD/BDM-42	41-3/4
		445,490	42	XB-52	53	25	31	36	56	68	80	BD/BDM-48	47-3/4
		-	48	XB-58	59	28	34	40	62	75	89	BD/BDM-54	53-3/4
		540	54	XB-64	65	31	38	44	68	83	98	BD/BDM-60	59-3/4
		-	60	XB-70	71	34	41	48	74	91	107	BD/BDM-66	65-3/4

ALL DIMENSIONS IN INCHES, WEIGHTS IN LBS.