



COOK


Spring Ceiling

MARK: _____

PROJECT: _____

DATE: _____

**Housing Spring
Spring Isolator
Ceiling Mounted**

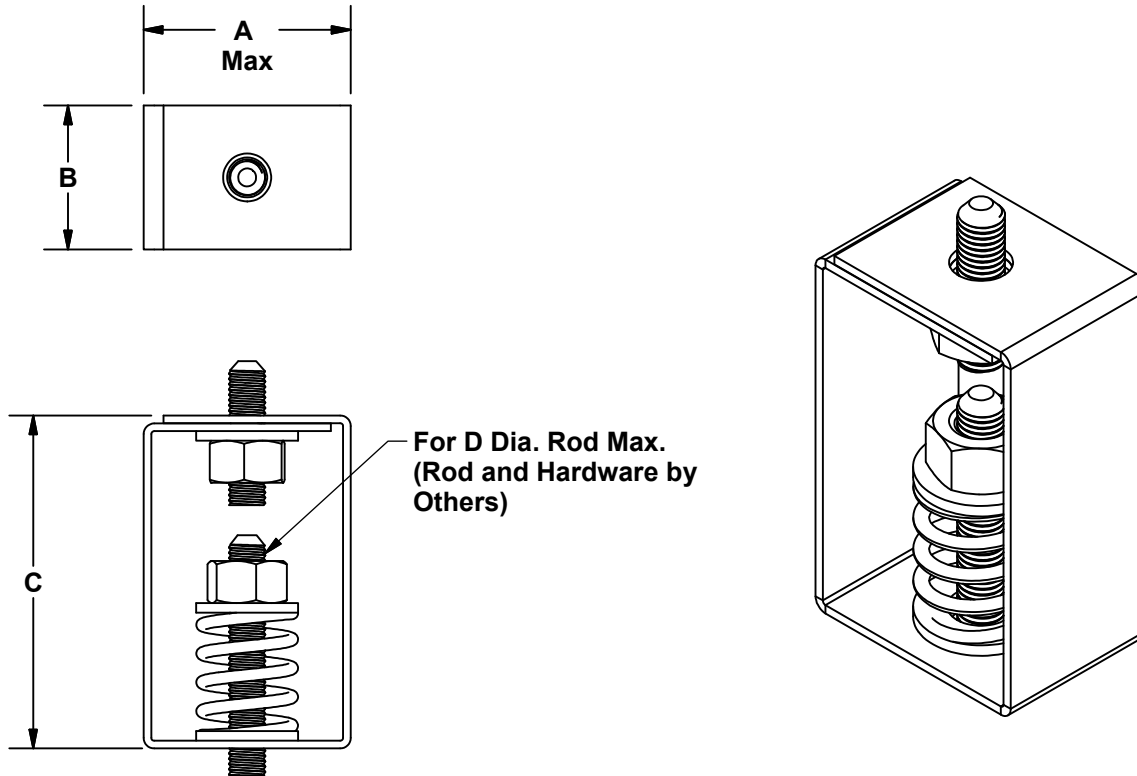

DIMENSION DATA

LC Model	Mfg.	Mfg. Model	Rated Deflect	Rated Load	Spr. Rate (lbs/in)	A	B	C	D	Unit Wt.
SC-35	VIMCO	HSF-042	1.03	35	34	2-5/32	1-1/2	3-15/32	1/2	2
SC-70	VIMCO	HSF-044	1.03	90	87	2-5/32	1-1/2	3-15/32	1/2	2
SC-125	VIMCO	HSF-045	1.10	185	168	2-5/32	1-1/2	3-15/32	1/2	2
SC-245	KNC	SH-1-245	1.19	245	206	3-11/16	2-1/4	5-1/4	5/8	2
SC-370	KNC	SH-1-370	1	370	370	3-11/16	2-1/4	5-1/4	5/8	2
SC-500	KNC	SH-1-500	1	500	500	3-11/16	2-1/4	5-1/4	5/8	2
SC-1000	KNC	SH-1-1000	1.15	1000	870	5-9/16	3-5/8	8-9/16	1	5
SC-1700	KNC	SH-1-1700	1	1700	1700	5-9/16	3-5/8	8-9/16	1	5

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.,
ALL ISOLATORS LISTED ARE DESIGNED TO PROVIDE A MINIMUM OF 50% OVERLOAD CAPACITY.