

MARK: _____

PROJECT: _____

DATE: _____



Tube Axial Drum Fan Triton Steel Propeller Belt Drive

DIMENSION DATA

Size	A	B	C	D	E	F	Drum Ga.	Ship Wt.
20	20	23-1/2	1-1/2	17-1/8	20	16-1/8	14 ga.	190
24	21	27-1/2	1-1/2	17-1/8	20	16-1/8	12 ga.	230
30	25	33-1/2	1-1/2	22-1/8	22	18-1/8	12 ga.	310
36	30	39-1/2	1-1/2	22-1/8	25	21-1/8	12 ga.	370
42	31	45-3/4	1-5/8	22-1/8	29	21-1/8	10 ga.	480
48	33	52-3/4	2-1/8	22-1/8	31	21-1/8	10 ga.	560
54	38	58-3/4	2-1/8	27	35	24-1/8	10 ga.	750
60	41	64-3/4	2-1/8	27	35	24-1/8	10 ga.	860
72	48	76-3/4	2-1/8	27	35	24-1/8	10 ga.	1120

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.


STANDARD CONSTRUCTION FEATURES:

Lorenized powder paint finish on all uncoated steel parts - Triton steel propeller - Extended lube lines provided on bearings - Adjustable pitch drives through 5 HP motor - Nema design B ball bearing motor - Static resistant belts - Corrosion resistant fasteners - Regreasable bearings in a cast housing rated at 200,000 hours L50 life -All fans factory adjusted to specified fan RPM.

ACCESSORIES

1. DISCONNECT SWITCH
2. INLET/OUTLET GUARD
3. FLOOR MOUNTING FEET
4. HANGING BRACKETS (V OR H)
5. INLET BELL
6. MOTOR COVER
7. BELT GUARD
8. INLET/OUTLET COMPANION FLANGES
9. HIGH TEMP 200°-300°F
10. HIGH TEMP 301°-500°F
11. UL LISTED FOR SMOKE CONTROL
12. HIGH TEMPERATURE BEARINGS HIGH
13. TEMPERATURE
14. PAINT
15. SPECIAL

**** Correct propeller rotation is CCW when viewing from inlet side.**

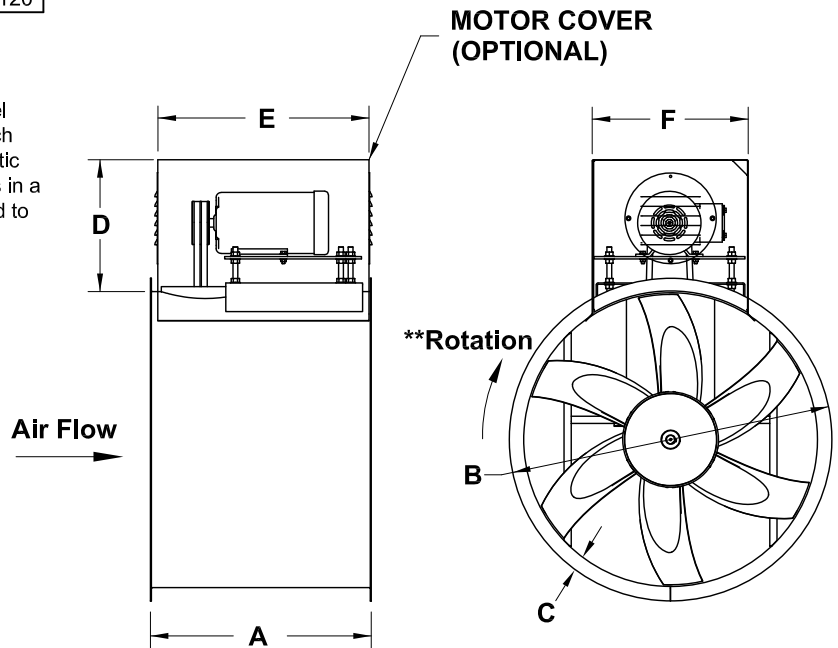

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES						
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE							

LARGEST MOTOR SHIPPED MOUNTED: ODP (OPEN DRIP-PROOF) 5 HP; 2 SP (2 SPEED) 2 HP; X-PRF (EXPLOSION PROOF) 2 HP; TEFC (TOTALLY ENCLOSED FAN COOLED) 3 HP.