



# COOK

# VAD

DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_




## Fixed Pitch Vane Axial Upblast Floor Mount Direct Drive Arrangement 4

Size	A	B	C	D	E	F	G	H	J	K
18	18	21-5/16	19-3/4	10 Ga.	19	7/16	12	23	3/8	16-1/4
21	21	24-5/16	22-3/4	10 Ga.	20	7/16	12	26-1/2	3/8	18-3/4
26	26	30-7/16	28	7 Ga.	22	7/16	12	31-1/2	3/8	22-1/4
29	29	33-7/16	31	7 Ga.	25	7/16	12	35-5/8	7/16	25-3/16
36	36	40-7/16	38	7 Ga.	32	9/16	16	42-5/8	7/16	30-1/8
42	42	46-1/2	44-3/8	7 Ga.	37	9/16	16	48-7/8	7/16	34-9/16
48	48	53-1/2	50-1/2	7 Ga.	42	9/16	16	55-7/8	9/16	39-1/2
54	54	59-5/8	56-1/2	1/4	46	9/16	16	60	5/8	42-7/16
60	60	65-5/8	63-1/4	1/4	46	9/16	16	68	5/8	48-1/16

Size	TEFC Max. Mtr. Frame	Ship Wt.
18	143TC	108
21	145TC	137
26	184TC	218
29	215TC	288
36	254TC	354
42	284TC	561
48	364TC	639
54	405TC	988
60	445TC	1135

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

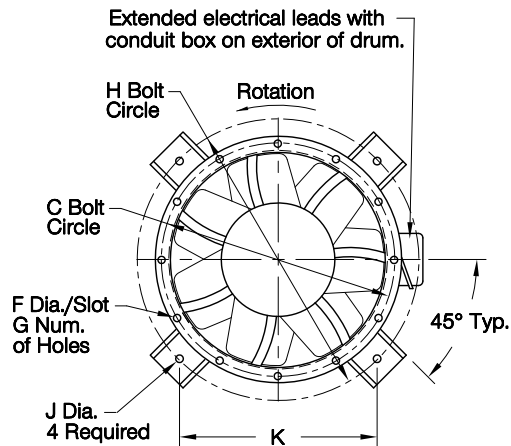

### STANDARD CONSTRUCTION FEATURES:

All aluminum cast prop – Minimum 10 ga.  
Lorenized steel housing with integral straightening vanes – Extended lube lines – C-face motor mount.

### ACCESSORIES

1. INLET/OUTLET GUARD
2. INLET/OUTLET COMPANION FLANGE
3. VIBRATION ISOLATORS
4. INLET BELL
5. INLET/OUTLET CONE
6. INSPECTION DOOR
7. SOUND MUFFLER
8. HUB COVER

