

MARK: _____

PROJECT: _____

DATE: _____



**Hurricane / Missile Impact
Resistant
Air Supply Package
Forward Curve - Belt Drive
Bottom Discharge
Roof Mounted**

DIMENSION DATA

Size	A Sq.	B	C	D	E	F	T Sq.	H x W Bottom Discharge Opening	Filters	
									Qty	Size
90	33-1/8	26-1/2	10-1/2	6-7/32	7	3	24-1/8	10-1/8 x 11-9/16	4	10-1/4 x 19-3/4
100	38-1/2	30	12-1/4	7-5/8	8-7/16	3	28-1/8	11-1/4 x 12-7/8	4	12 x 24
120	42-1/2	33-1/4	16-1/2	8-3/8	8-3/4	3	32-1/8	13-5/16 x 15-3/8	4	16 x 28
150	45-3/4	36-1/4	16-1/2	6-7/8	6-5/16	3	32-1/8	15-3/4 x 18-3/8	4	16 x 28
180	55-3/4	40-1/4	22-3/4	7-1/4	5-5/16	3	36-1/8	18-3/4 x 21-5/8	4	20 x 32
200	68	47-1/4	29	11-11/16	10-5/8	3	48-1/8	24-7/8 x 24-3/4	4	27-3/4 x 44

Size	Material Gauges		Roof Open. Sq.	Ship Wt.
	Base	Housing		
90	16	18	19-1/2	230
100	16	18	23-1/2	250
120	16	18	27-1/2	290
150	16	18	27-1/2	330
180	16	18	31-1/2	500
200	16	18	43-1/2	750

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.
*ROOF OPENING SIZE FOR CURBS SUPPLIED BY COOK ONLY.

MIAMI-DADE NOTICE OF ACCEPTANCE:


- TAS-201: Large Missile Impact Test
- TAS-202: Uniform Static Air Pressure Test
- TAS-203: Cyclic Wind Pressure Test

STANDARD CONSTRUCTION FEATURES:

DWDI blower mounted in a totally enclosed heavy gauge galvanized cabinet - Galvanized intake hood with 1" aluminum permanent washable filters - Permanently lubricated ball bearings motor - Adjustable pitch drives through 5 HP - Vibration isolators - Corrosion resistant fasteners - All fans factory adjusted to specified fan RPM.

ACCESSORIES

1. GRAVITY INTAKE DAMPER
2. MOTORIZED INTAKE DAMPER
3. DUCT ADAPTER
4. RCG GALVANIZED CURB
5. RCA ALUMINUM CURB
6. LIFTING LUGS/TIE DOWN POINTS
7. 2" ALUMINUM FILTERS

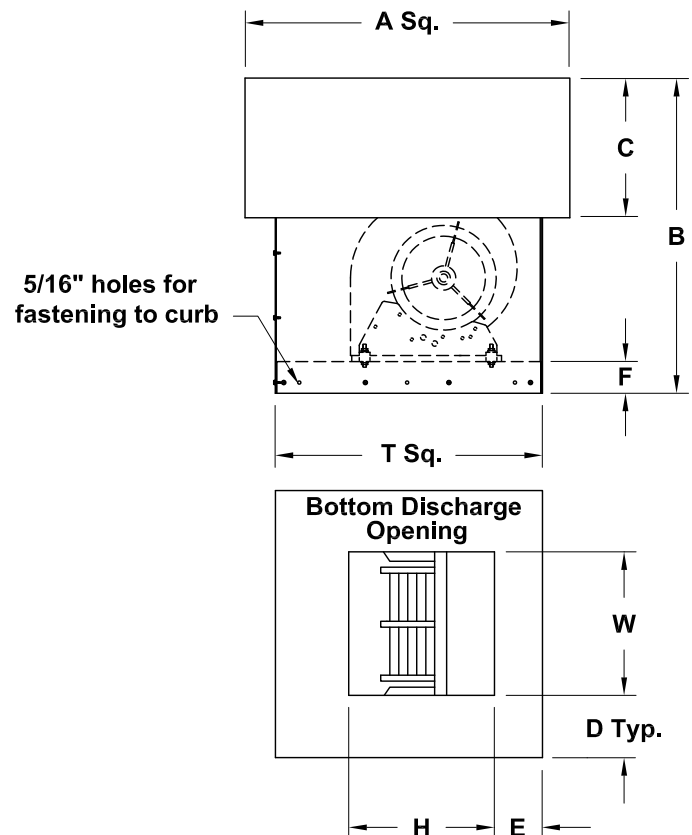

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES			
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE				

LARGEST MOTOR SHIPPED MOUNTED: ODP (OPEN DRIP-PROOF) 1 HP (SIZES 90-180), 5 HP (SIZE 200);

2 SP (2 SPEED) NONE (SIZES 90-180), 1-1/2 HP (SIZE 200); TEFC (TOTALLY ENCLOSED FAN COOLED)

NONE (SIZES 90-180), 1-1/2 HP (SIZE 200).